


# Fused Couplers 2000nm

## Product Overview

Phoenix single mode fiber couplers are designed for the 2 micron wavelength range. They are made by fusing and tapering two fibers together. The optical signal directed through the input fiber will be split into two at the fusion point. Phoenix can offer a variety of split ratios (with tap ratios from 10% to 50%). The couplers are available in 1x2, 2x2 and 2x4 configurations.

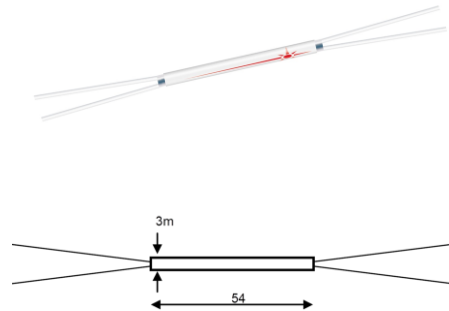

## Technical Details

SPECIFICATION:	Units	1x2 or 2x2 Port Couplers
Wavelength <sup>1</sup>	nm	2000
Bandwidth	nm	+/-15
Excess Loss	dB	0.3 (typ):0.6 (max)
Operating Temperature	°C	-5 to +70
Storage Temperature	°C	-40 to +85
Directivity	dB	>55
Fiber type		Nufern
Fiber lead lengths	mm	500
Dimensions	mm	54 x 3 dia

Notes:  
 1 Center wavelength can be tailored to customer requirements  
 Specifications on this product are being developed further and may change, please ensure that this is the latest available from the website.


## Features & Applications

### FEATURES:

- Low excess loss
- High directivity
- High power handling
- High return loss

### APPLICATIONS:

- Power splitting
- Power monitoring
- Optical fiber sensors

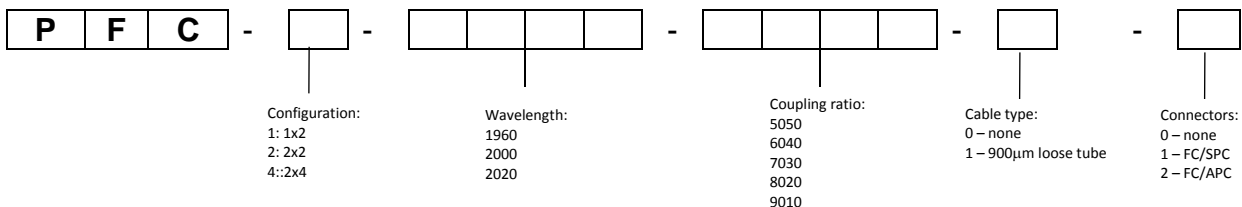

For more information please contact Phoenix sales:  
[sales@phoenixphotonics.com](mailto:sales@phoenixphotonics.com) or visit us at  
[www.phoenixphotonics.com](http://www.phoenixphotonics.com)